
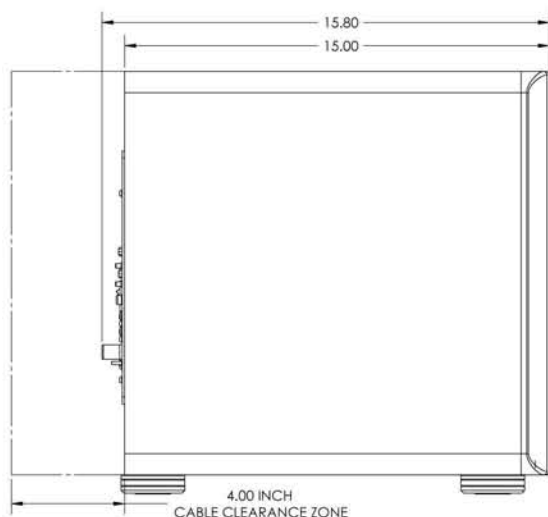


DD-12

THE REFERENCE STANDARD IN DIGITAL SERVO BASS REPRODUCTION

Features

- The reference standard for bass reproduction
- Patented, digital high-gain servo assures minimal distortion
- Perfect room-bass interaction with patented DD software
- Patented ERS amp, 1250 watt RMS / 3000 watt Dynamic
- Remote control with six custom presets

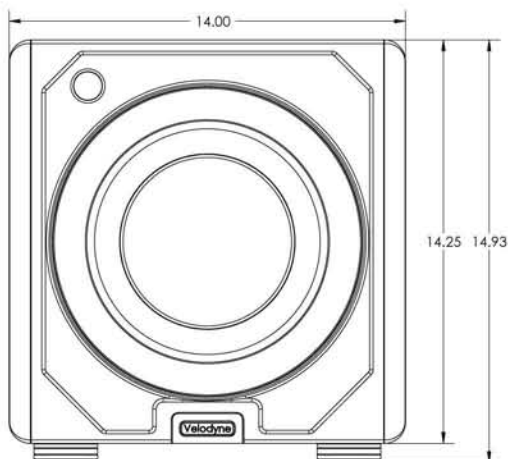

SPECIFICATIONS

Driver	12" forward firing (9.7" piston diameter)
Amplifier; Class D	3000 watts Dynamic 1250 watts RMS Power
Frequency Response	17 Hz to 120 Hz +/-3 dB
THD	<1% (typical)
High Pass Crossover	80 Hz at 6 dB/octave
Low Pass Crossover	15 Hz to 199 Hz (variable in 1 Hz increments) selectable slope Default: 80 Hz @ 24 dB/octave
Subsonic Filter	15 Hz to 35 Hz (variable in 1 Hz increments) selectable slope Default: 15 Hz @ 24 dB/octave
Phase	0° to 180° (variable in 15 degree increments)
Polarity	Adjustable (+/-)
Magnet Structure	310 ounces (19.3 lbs)
Voice Coil	Tandem 3-inch push-pull
Cone	Kevlar-reinforced resin
INPUTS	
LFE (Mono)	Line Level (RCA), Nominal Impedance 47K Balanced (XLR), Nominal Impedance 10K
Input (L&R)	Line Level (RCA)
Microphone	Balanced (XLR, cable included)
Speaker Level (L&R)	Bare wire, banana plugs, or spade lugs.
OUTPUTS	
Thru (L&R)	Line Level (RCA)
Output (L&R)	Line Level (RCA)
EQ Output	Line Level (RCA) for Test Signal L/R and Video (cables included)
Shipping Weight (approx)	67 lbs (30 Kg)
Dimensions (H/W/D) (inc. feet, grille & knobs)	14.8" x 14" x 15.8" (37.6 x 35.6 x 40 cm)
Included Accessories	Full feature remote control, Digital Drive Accessory Kit
Warranty (North America)	Three years (electronics), Five years (drivers)
Finishes	Black Gloss, Cherry or Maple