DLS-3500R

REMOTE-CONTROLLED SUBWOOFERS WITH DISTORTION LIMITING SYSTEM

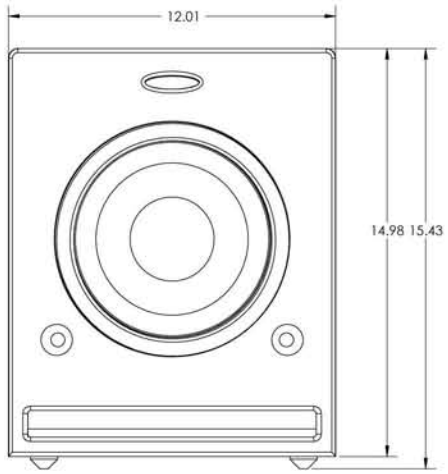

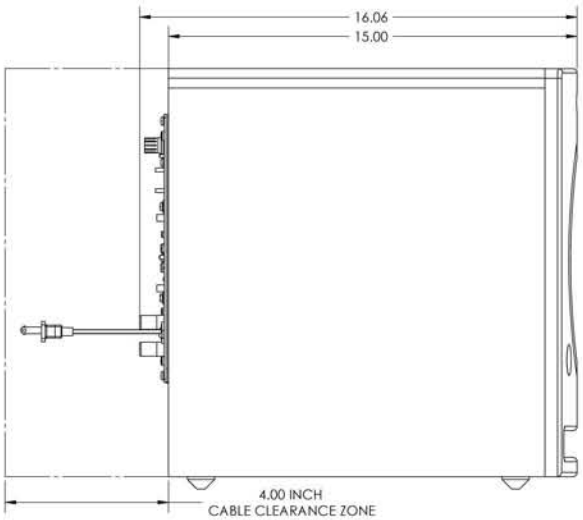

Features

- ***Full feature remote control***
- ***DSP digital control***
- ***Four customized listening mode presets***
- ***Slot-loaded, bass-reflex cabinet for low-distortion bass***
- ***Distortion Limiting System***

S P E C I F I C A T I O N S

Model	DLS-3500R
Power Requirements	117V, 60 Hz
Configuration	Extended Excursion, Slot-Loaded, Bass-Reflex
Driver	8" forward firing (6.3" piston diameter) with vented pole piece
Frequency Response	34-140 Hz 3 dB
Distortion Limiting System	Yes
High-Pass Crossover (Digital)	80 or 100 Hz (6 dB/octave slope)
Low-Pass Crossover (Digital)	40 Hz-120 Hz (adjustable) (12 dB octave, 24 dB ultimate)
Digital Phase	0°, 90°, 180°, 270°
Digital Presets	Movies; R&B-Rock; Jazz-Classical; Games
Auto On/Off	Yes
Continuous Power	160 watts
Dynamic Power	350 watts
Magnet	2.5 lbs.
Voice Coil	2" 2-layer copper
Inputs	Gold plated line-level and speaker-level
Outputs	Line-level and speaker-level
Crossover Bypass	Subwoofer Direct
Cone	Reinforced fiber
Dimensions (H/W/D) (inc. feet, grille & knobs)	15.5" x 12" x 16.5" (39.4 x 30.5 x 42 cm)
Finish	Black gloss lacquer front with black ash body
Shipping Weight (approx.)	44 lbs.
Warranty (parts/labor) (North America)	Three years (electronics) Five years (drivers)